


Sistema intercambiabile per tubo rame, plastica e multistrato.
Interchangeable system for copper, plastic and multilayer pipe.

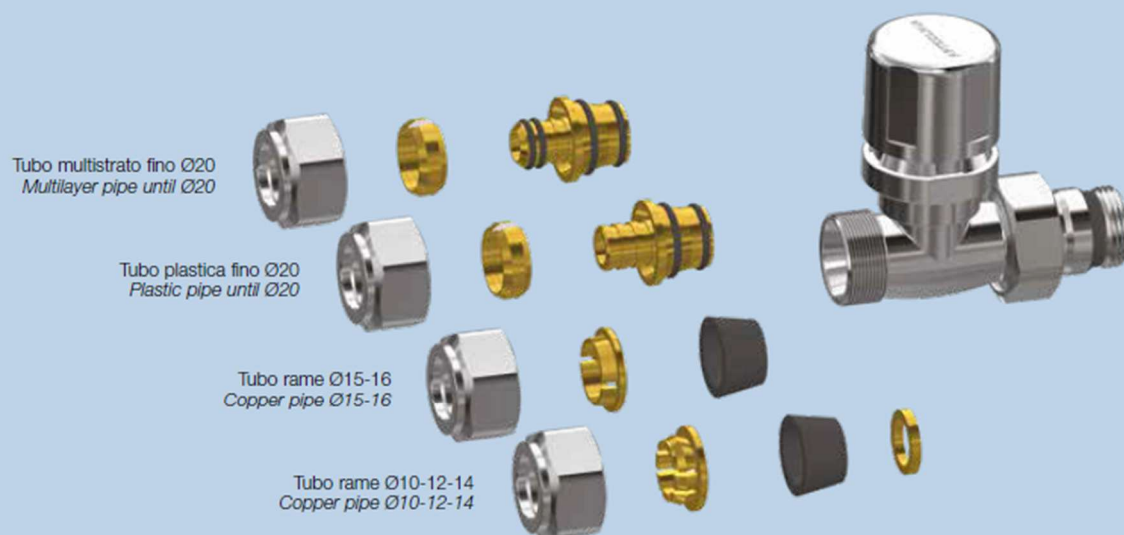

Adattatore a compressione per tubo rame, monocono in gomma, senza calotta

Compression adaptor for copper pipe with rubber monocone, without nut

720V

	F	×	⊗
72010V	Ø10	10	100
72012V	Ø12	10	100
72014V	Ø14	10	100



Adattatore a compressione per tubo rame, monocono in gomma, senza calotta

Compression adaptor for copper pipe with rubber monocone, without nut

721V

	F	×	⊗
72115V	Ø15	10	100
72116V	Ø16	10	100

CARATTERISTICHE TECNICHE

- Calotta ES.27 ottone CW 617N, Norma UNI EN 12165
 - Guarnizioni EPDM perossido, norma UNI EN 681-1, **(non adatte in presenza di oli minerali e idrocarburi)**
- Adattatori anelli, serratubi ottone CW614N, norma UNI EN12164
- Fluido d'impiego: acqua (anche potabile), soluzioni glicolate Max 30%
- Pressione massima d'esercizio: 12 bar
- Campo di temperatura: -20°C ÷ +110°C.

TECHNICAL DATA

- Nut of CW 617N brass, according to UNI EN 12165
 - EPDM peroxide O-ring, according to UNI EN 681-1, **(not in presence of mineral oil and hydrocarbon)**
- Adapter, ring, pipe lock of CW614N brass, according to UNI EN12164
- Working fluid: water (also potable), glycol fluid Max 30%
- Max operating pressure: 12 bar
- Temperature range: from -20°C to +110°C.