



100% Guaranteed ~ Built to Last

ATTITUDE

LE
ONAR
DO
EVOLUTIONSTILE



100% Guaranteed Built to Last

A new **visual concept** that describes the Leonardo products - 100% Guaranteed.

An **impossible** figure that overcomes the unstable, changing and inadvertent elements of reality to become an **absolute and eternal material**.

A figure which, like Leonardo products, positions itself **beyond time and physical space**.

The Leonardo ceramic surfaces - 100% Guaranteed, are achieved exclusively with **a mix of quality raw materials**, and with no need for the intervention of digital decoration.

This production technology makes the surfaces **truly unique**, creating a perfect harmony between performance and contemporary aesthetic yield.

Furthermore, it offers floors and cladding an exceptional stability and durability no matter where it is used, well **beyond the limits of imagination**.

BUILT TO LAST.

Un nuovo **visual concept** che descrive i prodotti Leonardo - 100% Garantito.

Una figura **impossibile**, che supera gli elementi instabili, mutevoli e accidentali della realtà per diventare **materia eterna, assoluta**.

Una figura che, come i prodotti Leonardo, si colloca **oltre il tempo e oltre lo spazio fisico**.

Le superfici ceramiche Leonardo - 100% Garantito sono ottenute esclusivamente con la **miscelazione di materie prime nobili**, senza alcun intervento di decorazione digitale.


Questa tecnologia produttiva rende le superfici **realmente uniche**, in perfetto equilibrio tra prestazione e resa estetica contemporanea.

Inoltre, assicura a pavimenti e rivestimenti una stabilità e una durezza straordinaria in qualsiasi contesto d'uso, **oltre i limiti del possibile**.

BUILT TO LAST.

THE RANGE

La gamma

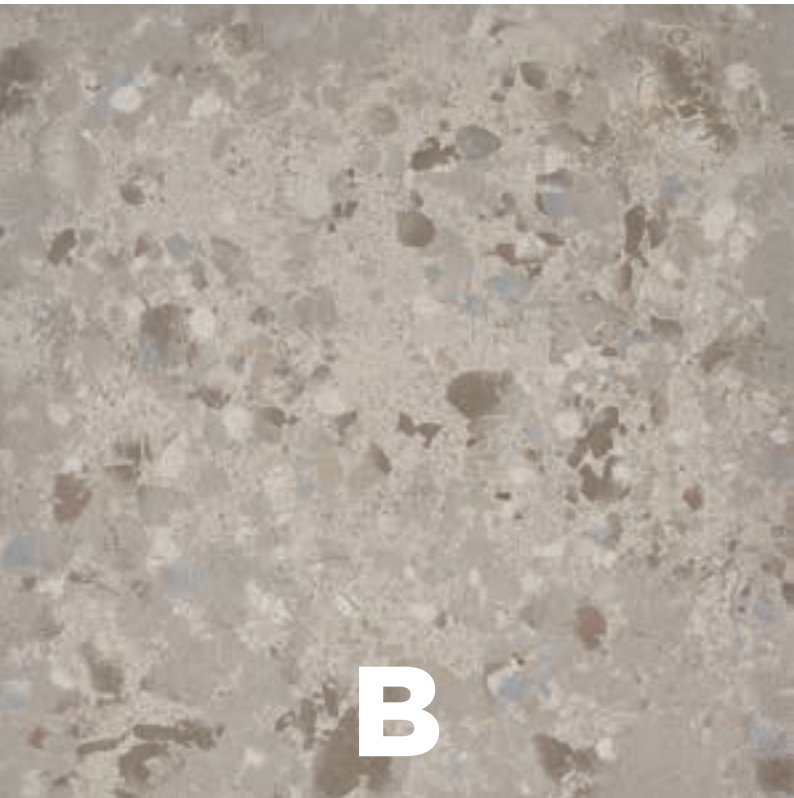


B

ATTITUDE
beige



W

ATTITUDE
white

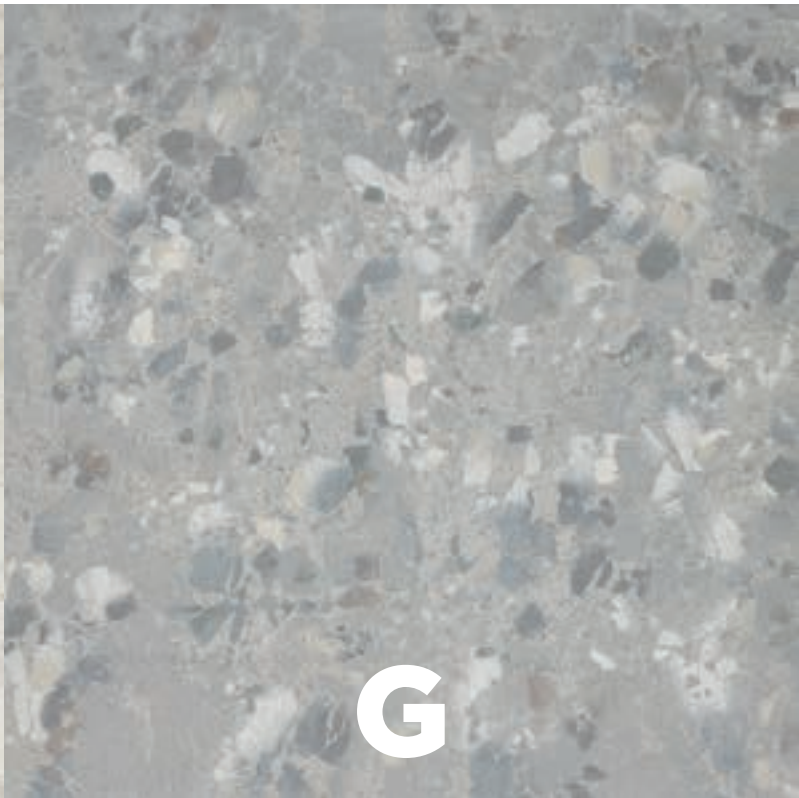

G

ATTITUDE
grey



DG

ATTITUDE
dark grey

ATTITUDE BY LEONARDO

THE BEAUTY OF CHANCE THAT CANNOT BE REPRODUCED

La bellezza irriproducibile
della casualità

Elegance, character, personality. In a word: **Attitude.**

This deep and intense ceramic surface is characterised by overlapping chips and flakes of different shapes and colours, *randomly arranged* to create a *unique and unrepeatable* texture.

It is an “industrial technological stone” that expresses the perfect balance of style and technique in Leonardo products, as every tile is different and obtained exclusively by grinding and mixing raw materials with no digital intervention or additional enamels.

Eleganza, carattere, personalità. In una parola: **Attitude.**

Una superficie ceramica intensa e profonda, caratterizzata dalla sovrapposizione di scaglie e grani differenti per forma e colore disposti in modo *casuale* che creano una texture *unica e irripetibile*.

Una “pietra tecnologica industriale” che sintetizza il perfetto equilibrio tra estetica e tecnica dei prodotti Leonardo: ogni lastra è diversa dalle altre, ottenuta esclusivamente dalla frantumazione e miscelazione di materie prime senza interventi digitali e senza l'aggiunta di smalti.

ATTITUDE BY LEONARDO

BEYOND THE SURFACE

Oltre la superficie

natural

silk

Attitude is available in 4 different colour codes (Beige, White, Grey and Dark Grey) and in 120x120, 60x120, 60x60 e 30x60 cm formats.

It comes in both natural and “silk” finishes that give this product an opaque, distressed and three-dimensional effect that increases the tactile sensation and material realism of its surface.

Attitude è disponibile in 4 diversi codici cromatici (Beige, White, Grey, Dark grey) e nei formati 120x120, 60x120, 60x60 e 30x60 cm.

È proposta sia nella finitura naturale sia nella nuova finitura “silk” che conferisce al prodotto un effetto tridimensionale opaco e vissuto, aumentando la resa tattile e il realismo materico della superficie.

ATTITUDE BY LEONARDO

STYLE AND STABILITY

Estetica e stabilità

Attitude is **100% GUARANTEED**: the seal of warranty for the Leonardo products - Icon, Crush, Overcome, Endless - indicating fitness for the design of surfaces and environments requiring the highest level of stability and durability.

Because Leonardo is **Built to Last**: *beyond time and physical space*.

Attitude è **100% GUARANTEED**: il sigillo di garanzia dei prodotti Leonardo - Icon, Crush, Overcome, Endless - per la progettazione di ambienti e superfici che richiedono la massima stabilità e durevolezza.

Perché Leonardo è **Built to Last**: *oltre il tempo e oltre lo spazio fisico*.

ATTITUDE **B**
beige

Walls
Pareti
ATTD 120B RM



Floor
Pavimento

ATTD 120B RM



ATTITUDE
white

W

Walls
Pareti

ATTD 120W SK



Floor, walls
Pavimento, pareti

ATTD 120W SK



ATTITUDE WHITE



Floor, walls
Pavimento, pareti
ATTD 120G RM



ARRIVALS

Floor
Pavimento

ATTD 120G RM



ATTITUDE DG
dark grey

Walls
Pareti
ATTD 120DG RM



Floor, walls
Pavimento, pareti



ATTD 120DG RM



ATTITUDE DARK GREY

ATTITUDE
beige

B

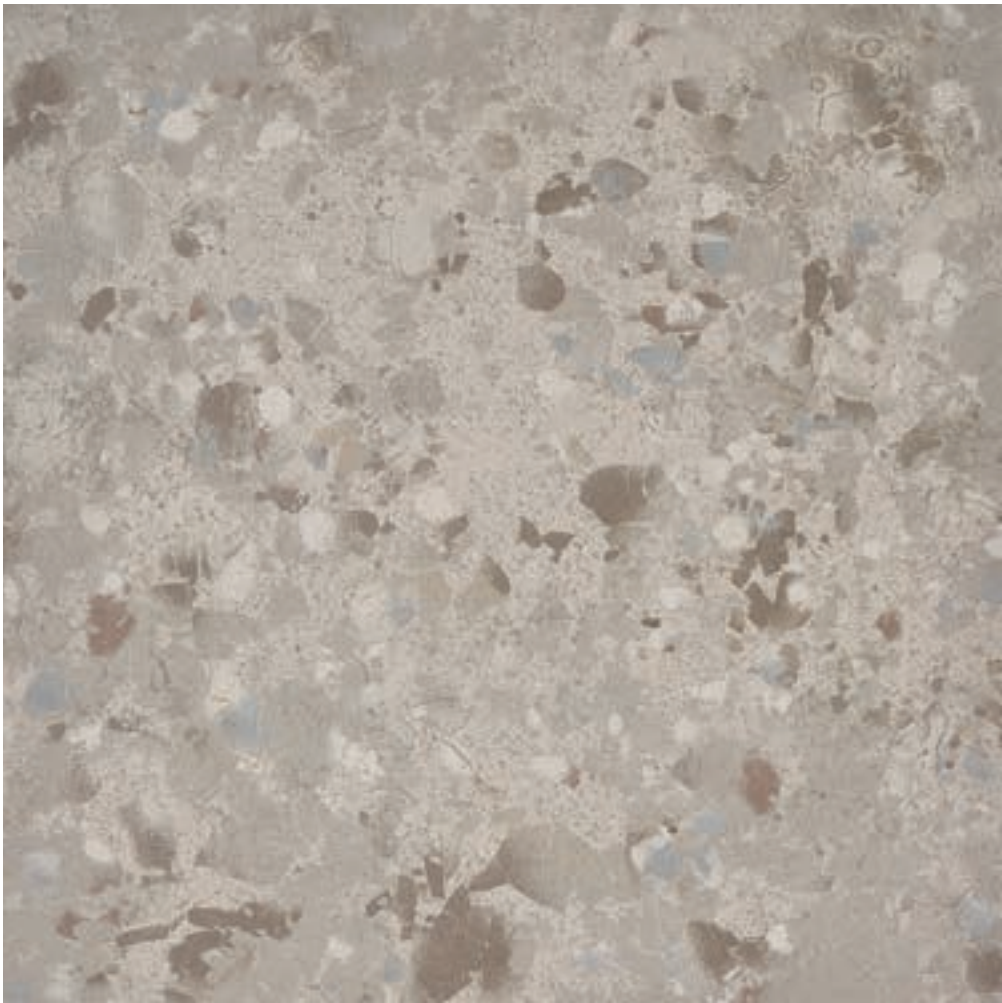

120x120
48"x48"



60x120
24"x48"



60x60
24"x24"




30x60
12"x12"

N	ATTD 120B RM	ATTD 12B RM	ATTD 60B RM	MK.ATTD 30B
SK	ATTD 120B SK	ATTD 12B SK	ATTD 60B SK	
N	ATTD R120B RM		ATTD R60B RM	

Grout Stucchi	
Mapei	112
Kerakoll	79

ATTITUDE
white

W



120x120
48"x48"



60x120
24"x48"



60x60
24"x24"



30x60
12"x12"



N	ATTD 120W RM	ATTD 12W RM	ATTD 60W RM	MK.ATTD 30W
SK	ATTD 120W SK	ATTD 12W SK	ATTD 60W SK	
N	ATTD R120W RM		ATTD R60W RM	

Grout Stucchi	
Mapei	103
Kerakoll	4

ATTITUDE

grey

G

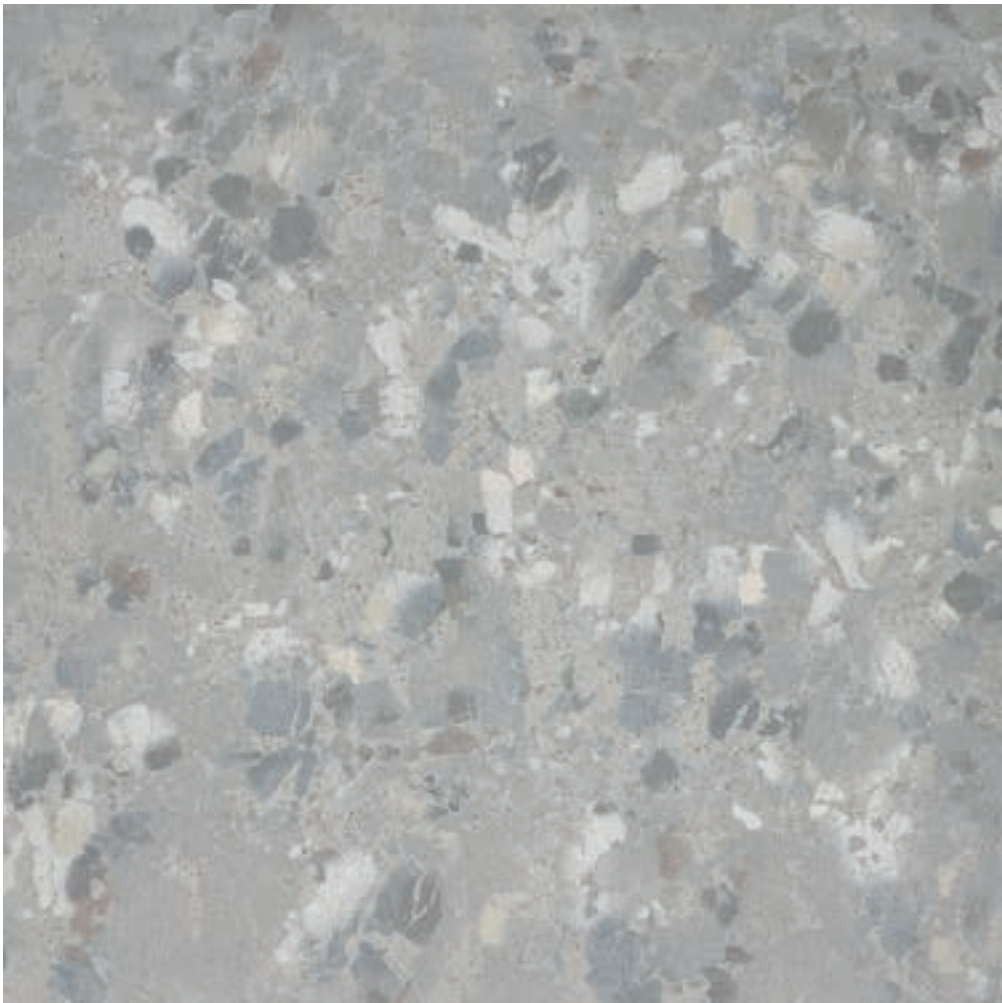

120x120
48"x48"



60x120
24"x48"



60x60
24"x24"



30x60
12"x12"


N	ATTD 120G RM	ATTD 12G RM	ATTD 60G RM	MK.ATTD 30G
SK	ATTD 120G SK	ATTD 12G SK	ATTD 60G SK	
N	ATTD R120G RM		ATTD R60G RM	

Grout Stucchi	
Mapei	112
Kerakoll	68

ATTITUDE

dark grey

DG



120x120
48"x48"



60x120
24"x48"



60x60
24"x24"



30x60
12"x12"

N	ATTD 120DG RM	ATTD 12DG RM	ATTD 60DG RM	MK.ATTD 30DG
SK	ATTD 120DG SK	ATTD 12DG SK	ATTD 60DG SK	
N	ATTD R120DG RM		ATTD R60DG RM	

Grout Stucchi	
Mapei	113
Kerakoll	69

THROUGH-BODY PORCELAIN TILE
GRES PORCELLANATO A TUTTA MASSA



TRIMS
PEZZI SPECIALI

	 6x60  2.4"x24"	 6x120  2.4"x48"	 120x32,5  48"x12.8"
ATTD B	ATTD BT60B	ATTD BT120B	ATTD G120B
ATTD W	ATTD BT60W	ATTD BT120W	ATTD G120W
ATTD G	ATTD BT60G	ATTD BT120G	ATTD G120G
ATTD DG	ATTD BT60DG	ATTD BT120DG	ATTD G120DG

PACKING
IMBALLI

			BOX			PALLET		
NOMINAL SIZE FORMATO NOMINALE	EDGE BORDO	THICKNESS SPESSORE	PCS/BOX PZ/BOX	SM/BOX MQ/BOX	KG/BOX KG/BOX	BOX/PALLET BOXES/PALLET	MQ/PALLET SM/PALLET	KG/PALLET KG/PALLET
120x120 / 48"x48"	rectified	10,5	1	1,44	36,35	36	51,84	1328,63
60x120 / 24"x48"	rectified	10,5	2	1,44	35,40	27	38,88	975,80
60x60 / 24"x24"	rectified	10,5	3	1,08	26,38	32	34,56	864,12
30x30 MOSAICO / 12"x12"	rectified	10,5	6	0,54	12,38	48	25,92	614,24

ART.	DIN 51130 (R)	DIN 51097 (A+B+C)	BCR REP. CEC 6/81		DM 14/6/89 N.236		PENDULUM TEST BS (INGLESE)	PENDULUM TEST AS/NXS 4856:2004 (AUSTRALIANO)	PENDULUM TEST UNE ENV 12633:2003 (SPAGNOLO)	BOT 3000 (DCOF)
			g.a.	g.b.	c.a.	g.b.				
ATTD	R10	A + B	> 0,4	> 0,4	> 0,4	> 0,4	> 25	> 25	1	> 0,42
ATTD R	R11	B + C	> 0,4	> 0,4	> 0,4	> 0,4	> 36	> 45	3	> 0,42

TECHNICAL SPECIFICATIONS PORCELAIN STONEWARE / CARATTERISTICHE TECNICHE GRES PORCELLANATO
UNI EN 14411 (ISO 13006) - Bla (appendice/appendix G)

Specification Caratteristica	Test methods Metodo di prova	Requirements in accordance to the standards Requisiti previsti dalla norma	Average value Valore medio		
 DIMENSIONS AND APPEARANCE DIMENSIONI E ASPETTO	ISO 10545-2	PROSPECT G.1 PROSPETTO G.1	COMPLIANT CONFORME		
 WATER ABSORPTION ASSORBIMENTO D'ACQUA	ISO 10545-3	≤ 0,5%	< 0,1%		
 FLEXURAL RESISTANCE RESISTENZA A FLESSIONE		MIN/min.35 N/mm²	> 45 N/mm2		
MODULUS OF RUPTURE SFORZO DI ROTTURA	ISO 10545-4	THICKNESS / SPESSORE ≥7,5 mm: min. 1300 N	THICKNESS* SPESSORE*	6,5 mm	1800 N*
		THICKNESS / SPESSORE <7,5 mm: min. 700 N		10 mm	3000 N*
				20 mm	11000 N*
 DEEP ABRASION RESISTANCE RESISTENZA ALL'ABRASIONE PROFONDA	ISO 10545-6	≤ 175 mm³	< 140 mm³		
RESISTANCE TO SURFACE ABRASION RESISTENZA ALL'ABRASIONE SUPERFICIALE	ISO 10545-7	CLASSES 0-5 CLASSI 0-5	AS INDICATED IN THE CATALOGUE COME INDICATO IN CATALOGO		
 LINEAR EXPANSION THERMIC COEFFICIENT COEFFICIENTE DILATAZIONE TERMICA LINEARE (α)	ISO 10545-8	AVAILABLE ON REQUEST METODO DISPONIBILE	≤ 7x10 ⁻⁶ °C ⁻¹		
 RESISTANCE TO SUDDEN TEMPERATURE CHANGES RESISTENZA AGLI SBALZI TERMICI	ISO 10545-9	AVAILABLE ON REQUEST METODO DISPONIBILE	RESISTANT RESISTE		
 FROST RESISTANCE RESISTENZA AL GELO	ISO 10545-12	ALWAYS TESTED RICHIESTA	RESISTANT RESISTE		
 HOUSEHOLD CHEMICALS AND SWIMMING POOL WATER CLEANSERS PRODOTTI CHIMICI AD USO DOMESTICO ED ADDITIVI PER PISCINA		MIN. B min. B	MIN. B min. B		
ACIDS AND LOW CONCENTRATION ALKALIS ACIDI ED ALCALI A BASSA CONCENTRAZIONE	ISO 10545-13	FROM LA, LB TO LC DA LA, LB A LC	FROM LA, LB TO LC DA LA, LB A LC		
ACIDS AND HIGH CONCENTRATION ALKALIS ACIDI ED ALCALI AD ALTA CONCENTRAZIONE		AVAILABLE ON REQUEST METODO DISPONIBILE	AVAILABLE ON REQUEST METODO DISPONIBILE		
 STAIN RESISTANCE UGL RESISTENZA ALLE MACCHIE UGL	ISO 10545-14	AVAILABLE ON REQUEST METODO DISPONIBILE	AVAILABLE ON REQUEST METODO DISPONIBILE		
STAIN RESISTANCE GL RESISTENZA ALLE MACCHIE GL		MIN. 3 min. 3	MIN. 3 min. 3		

* VALUES REFERRED TO 60X60 SIZE / VALORI RIFERITI AL FORMATO 60X60

LEONARDO

SYMBOLS
SIMBOLOGIA

INDICATIONS FOR USE
INDICAZIONI D'USO

 Floor tiles
Pavimento

 Wall tiles
Rivestimento

SUGGESTED APPLICATIONS
DESTINAZIONI D'USO

 Domestic purpose
Abitazioni

 Light traffic area
Commerciale leggero

 Retail
Commerciale

 Heavy traffic area
Commerciale pesante

 Outdoor floor
Esterni

SURFACES
SUPERFICI

FINISH
FINITURA

 Natural
Naturale

 Silk
Silk

SURFACE LOOK
ASPETTO SUPERFICIALE

 Matt
Opaco

 Semi-glossy
Semilucido

EDGE
BORDO

 Monocaliber, rectified
Rettificato monocalibro

SHADE VARIATION
STONALIZZAZIONE

 V2

THICKNESS
SPESSORE

 10,5

SALES CHARACTERISTICS
CARATTERISTICHE DI VENDITA

 Product sold per item
Prodotto venduto al pezzo

All our products are sold only in complete boxes, whether the unit of measure is per item or per square metre.
Tutti i nostri prodotti, sia al mq che al pezzo, sono venduti unicamente a scatola completa.



EVOLUTIONSTILE

leonardoceramica.it



A brand of
Cooperativa Ceramica d'Imola S.c.

Via V. Veneto, 13
40026 Imola (BO) Italia
Tel. +39 0542 601601
Fax +39 0542 31749

