


Kcal = Watt x 0.860
BTU = Watt x 3.413

Watt Δt 60° = Watt Δt 50° x 1.260
Watt Δt 40° = Watt Δt 50° x 0.754
Watt Δt 30° = Watt Δt 50° x 0.523
Watt Δt 20° = Watt Δt 50° x 0.313


p max = 8.0 bar

Reversible radiator
Radiateur réversible
Reversibler Heizkörper
Radiador reversible

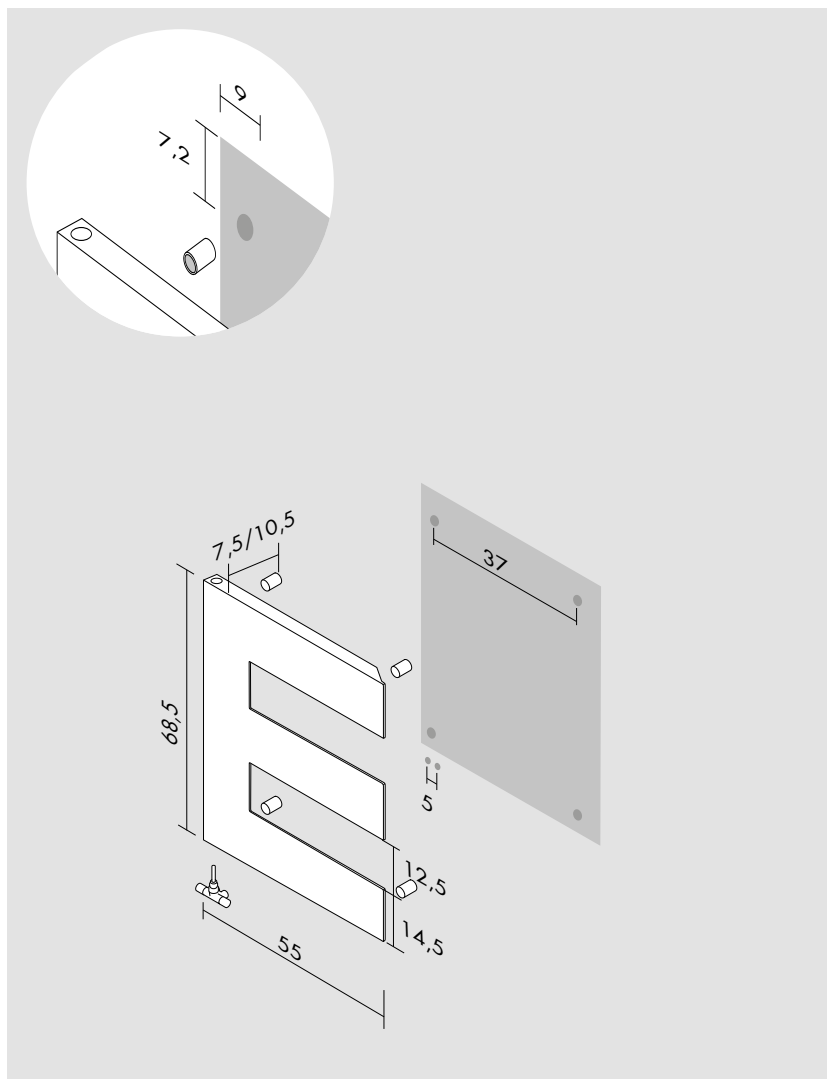


[F]

Standard connection / Raccord standard
Standard Anschluss / Conexión estándar

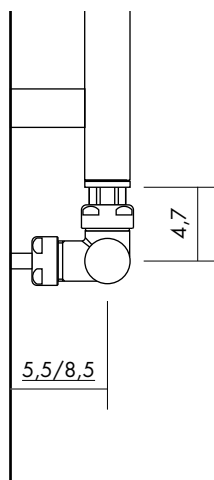


[H]

Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

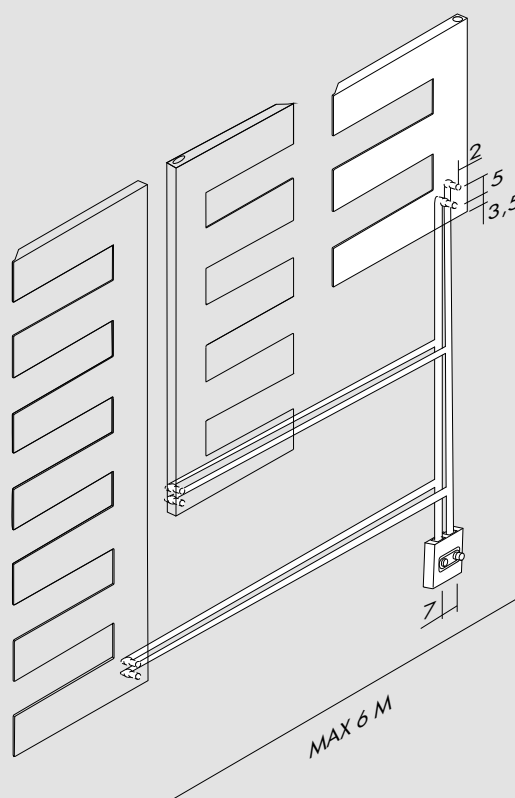

E12VI_

Built-in valves
Vanne encastrer
Einbauventile
Válvulas de empotrar

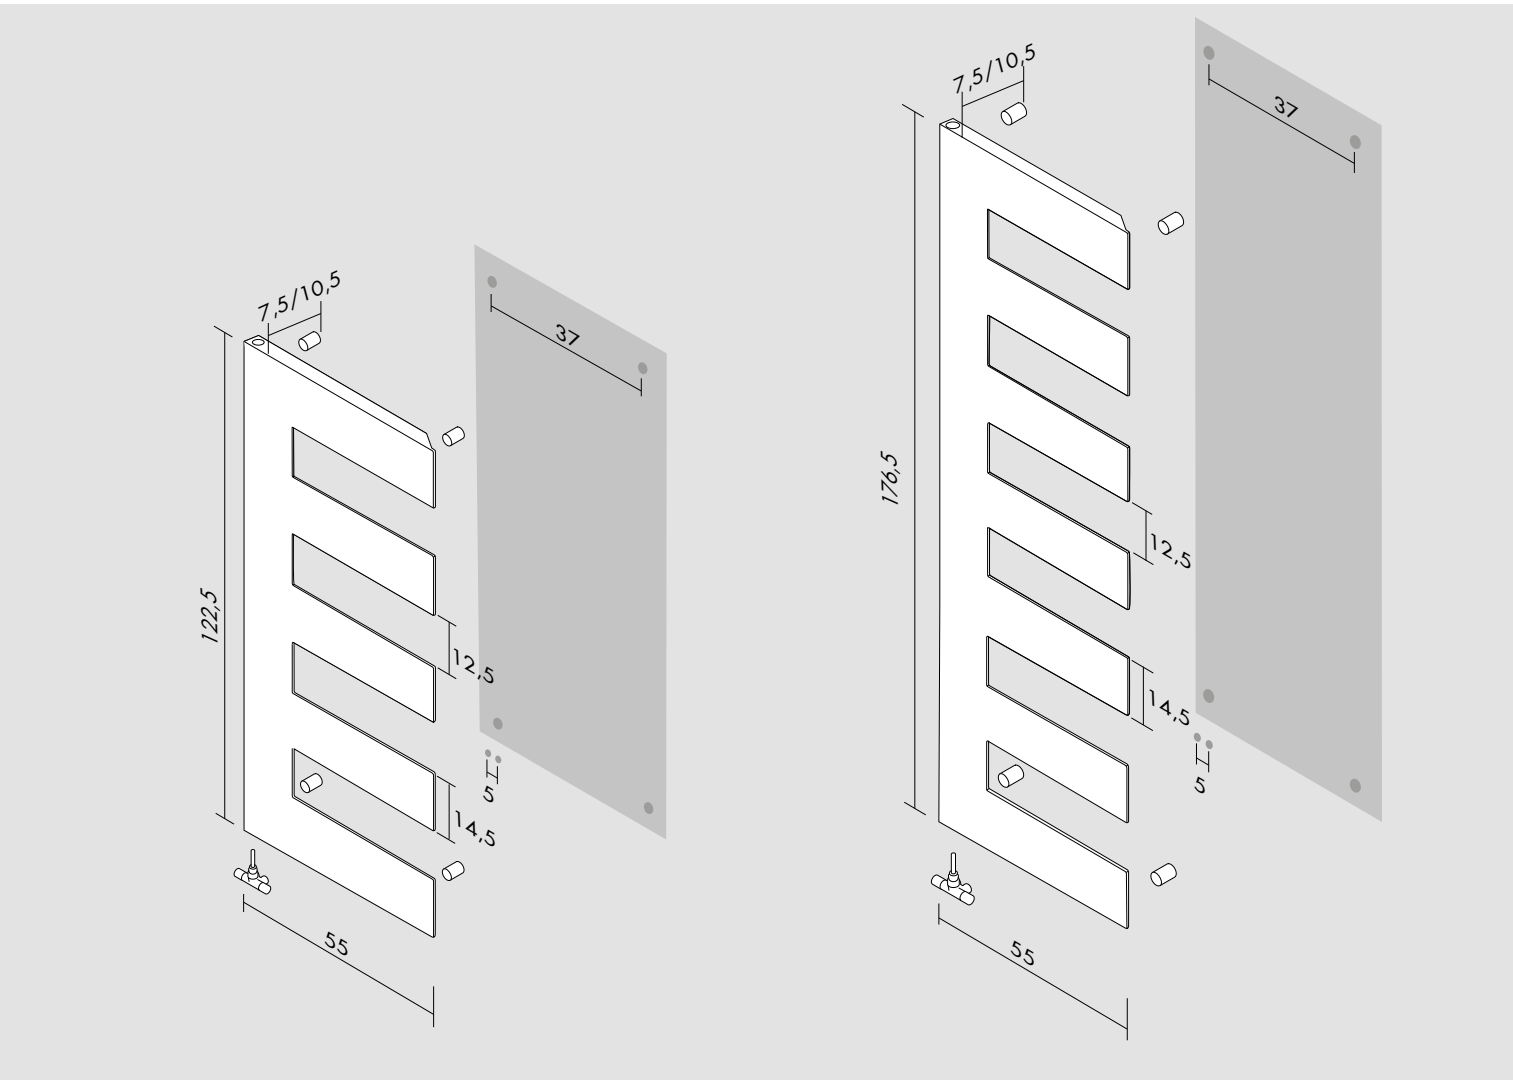

Pettine

H cm	L cm	I* cm	art*	Lt*	watt Δt 30°	watt Δt 50°
68.5	55.0	5.0	PTNA068055	1.0	147	282
122.5	55.0	5.0	PTNA122055	1.9	248	474
176.5	55.0	5.0	PTNA176055	2.8	338	647

Optional




(P* = 235)

Angled monotube valve
Vanne monotube équerre
Einrohrige Ventil
Válvula monotubo a escuadra
[BIAN] **E12MBSQB**
[CROM] **E12MBSQR**




⚠ (P* 236)

Thermostatic head
Tête thermostatique
Thermostatkopf
Cabezal termostático
[BIAN] **TTB**
[CROM] **TTR**



(I* = 5 cm)

Sleeving kit
Kit couvre tuyau
Rosetten
Kit cubre tubo
[BIAN] **C5B**
[CROM] **C5R**




(P* = 236)

Built-in valves
Vanne à encaisse
Einbauventile
Válvulas de empotrar
[BIAN] **E12VIB**
[CROM] **E12VIR**




art* = item / modèle / Artikel / artículo I* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
Lt* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento
P* = page / page / Seite / página

Pettine design Andrea Crosetta

Acqua calda / hot water / eau chaude / warm Wasser / agua caliente
[F]

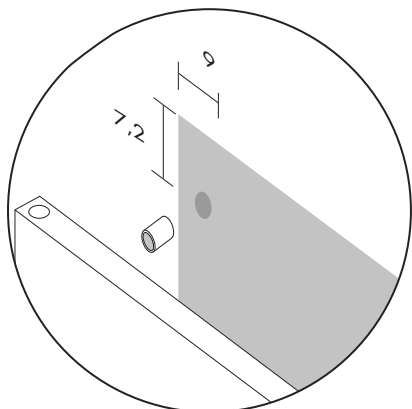

Radiatore reversibile
Reversible radiator
Radiateur réversible
Reversibler Heizkörper
Radiador reversible

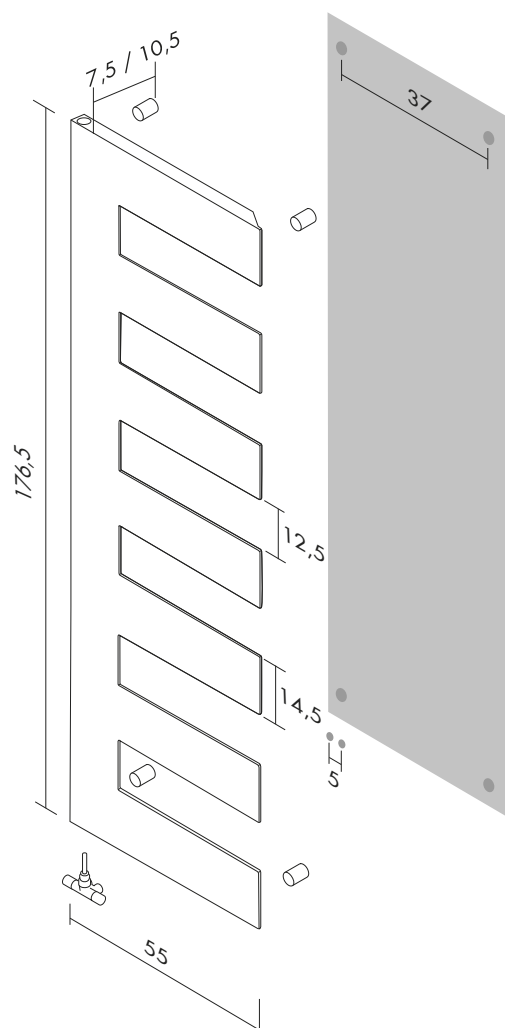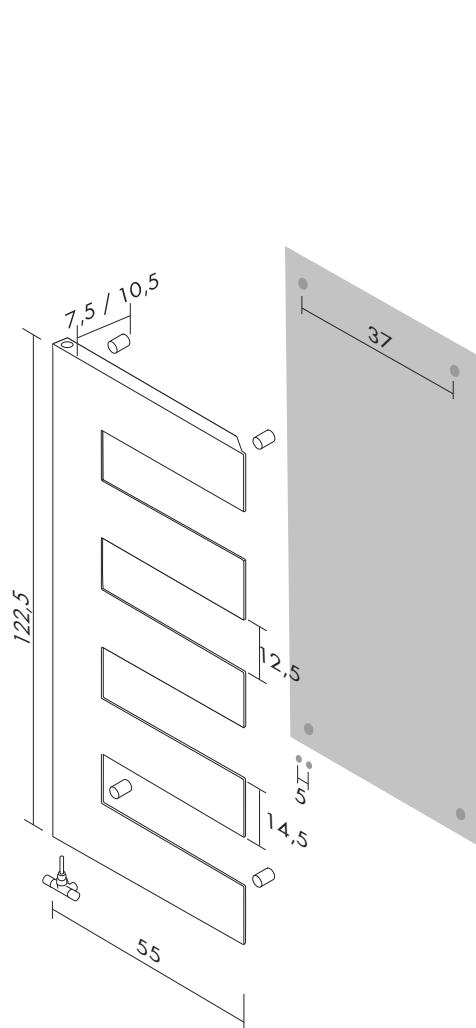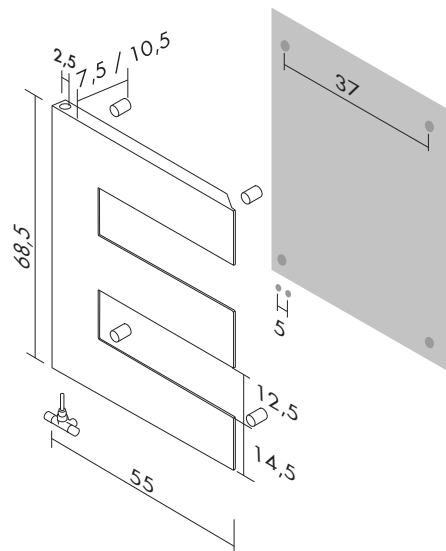

Pettine design Andrea Crosetta**Acqua calda / hot water / eau chaude / warm Wasser / agua caliente**
[H]