



Schede tecniche

Technical tables



UNI EN ISO 9001:2015 - Cert. n.4807/3

310LL - 310BB - 310BC - 310MB
310MR - 310MA - 310MS - 310 NO
Comando termostatico
Thermostatic head

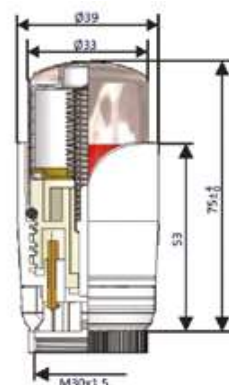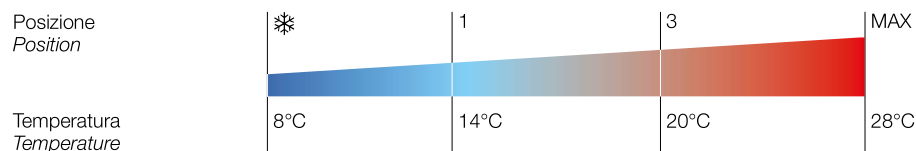

CARATTERISTICHE TECNICHE / COSTRUTTIVE

- Sensore incorporato ad espansione di liquido
- Campo di regolazione: da 8°C (*) a 28°C (MAX)
- La posizione intermedia corrisponde alla regolazione "3"
- Pressione massima differenziale: 1 bar
- Pressione massima di esercizio: 10 bar
- Campo di inalterabilità elemento termostatico: -10°C / + 50°C
- Tempo di risposta totale: 22 min.
- Ghiera di fissaggio in ottone CW614N
- Attacco: M30x1,5
- Dispositivo classificato "a bassa inerzia termica"

TECHNICAL DATA / CONSTRUCTION CHARACTERISTICS

- With expansion liquid sensor
- Setting range: from 8° C (*) to 28° C (MAX)
- The intermediate setting is at position "3"
- Maximum differential pressure: 1 bar
- Maximum operating pressure: 10 bar
- Inalterability range thermostatic element -10 ° C / 50 ° C
- Total response time: 22 min.
- Fastening ring nut of brass CW614N
- Connections: M30X1,5
- Classified as items "with low thermic inertia"

ISTRUZIONE PER UNA CORRETTA INSTALLAZIONE / ISTRUCTION FOR PROPER INSTALLATION

